



BENECOR DEF STANDARD FLOW SUBMERSIBLE PUMPS

BENECOR'S powerful multi-stage Submersible Standard Flow Pump is available with 2, 3, or 4 impellers and is ideal for use in supplying DEF from storage tanks.

FEATURES

- Overload Protections: Built-In Thermal & Current Overload Protection
- Liquid Quality Requirements: Clean, Free From Solid Or Abrasive Substances



TECHNICAL SPECIFICATIONS

- Liquid Temperature: Range From +32°F To +113°F (0°C TO +45°C)
- Maximum Ambient Temperature: +104°F (+40°C)
- Maximum Operating Pressure: 4.6 Bar (64 PSI)
- Installation: Fixed In A Horizontal Or Vertical Position

PART NUMBERS

- 1/2 HP Submersible Pump: 530SUB12
- 3/4 HP Submersible Pump: 530SUB34
- 1 HP Submersible Pump w/Viton Seal: 530SUB1.0

| HP | H Max Ft | Max GPM | Discharge Opening | Impellers | Max PSI | Inch | Lb |
|-----|----------|---------|-------------------|-----------|---------|--------------|--------------|
| 1/2 | 79 | 25 | 1" | 2 | 35 | 5.9x5.9x13.8 | 16 16.5 |
| 3/4 | 118 | 25 | 1" | 3 | 52 | 5.9x5.9x14.8 | 18.7 19.1 |
| 1 | 157 | 25 | 1" | 4 | 64 | 5.9x5.9x15.7 | 19.4 19.8 |

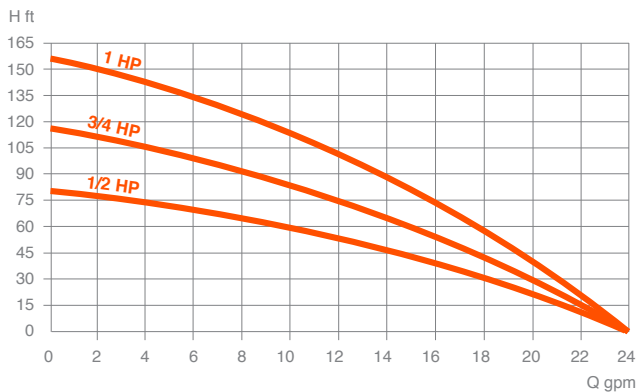

l x d x h



FOR MORE INFORMATION CONTACT BENECOR DIRECTLY

1-844-BENECOR
1 - 8 4 4 - 2 3 6 - 3 2 6 7

MOST ITEMS ARE
IN-STOCK & SHIP
WITHIN 24 HRS

